


Ihre Konfiguration

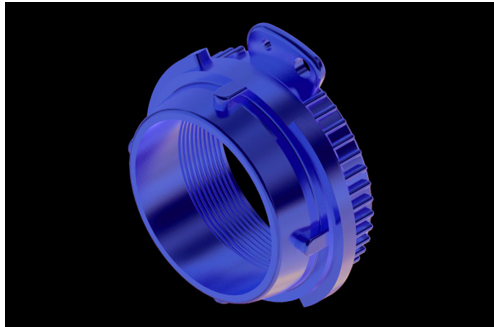

Material	Brass
Thread seal	Polyurethane rubber (AU)
Thread inch/mm	BSP 2"
AN mm (inch)	VK 50
Series	VK
max. operating pressure	16 bar / 232 PSI
Operation temperature	-20°C to +65°C