











WASTE OIL EQUIPMENTS

FEATURES

- EASY-TO-READ BIG DISPLAY
- · SWIVEL DISPLAY
- STANDARD BATTERY
 PULSE-OUT VERSION AVAILABLE
 ADJUSTABLE FLANGES
- · AA STANDARD BATTERY

The PIUSI K600 B/3 is an oval gear meter suitable for monitoring the delivery of low, medium and high viscosity oils. This special version includes a large built-in digital display.

PERFORMANCE

100 L/MIN	70 BAR
FLOW RATE	OPERATING PRESSURE
± 0,5 %	0,2%
ACCURACY	REPEATABILITY





K600 B/3 PULSE-OUT

PACKAGING										
CODE	WEIGHT		PACKAGING							
3322	KG	LBS	ММ	INCH PCS/PALLET		PCS/BOX				
METERS										
F00491010	2	4,4	200X120X140	7,9X4,7X5,5		1				
PULSE OUT METER										
F00492010	2	4,4	200X120X140	OX12OX14O 7,9X4,7X5,5		1				







TANK MONITORING



HOSE REELS





ACCESSORIES

MERCHANDISE

INDEX


























CHART

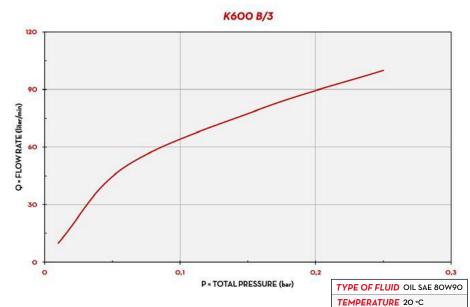

IN THE BOX

- · K600 B/3 METER
- · INSTRUCTION MANUAL

DETAILS










DIMENSIONS

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER







Dimensions expressed in millimeters

TECHNIC	AL DATA										
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		WORKING PRESSURE		BATTERY INCLUDED	FLANGE	INLET	INLET	
			L/MIN	GPM	BAR	PSI	NO. 2 2X1,5V		OUTLET	FILTER	
METERS											
F00491010	K6OO B/3 3/4" BSP OIL	0	6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES	
PULSE OUT METER											
F00492010	K6OO B/3 3/4" BSP OIL W/PULS OUT	0	6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES	

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K600 B/3